



REV	DESCRIPTION	DATE

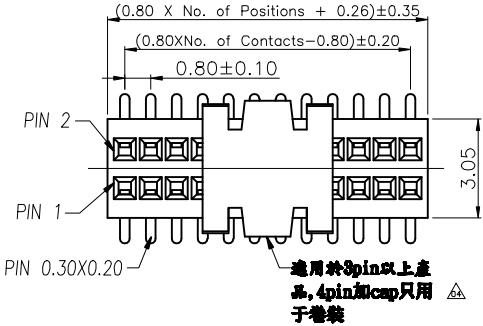

Materials

Contact Material: Phosphor Bronze

△ Housing Material: High Temperature Thermoplastic,
UL 94V-0 LCP or the equivalent material
COLOR: BLACK

Specifications

Current Rating: 0.5Amp



Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC


Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

requirement for environment protection

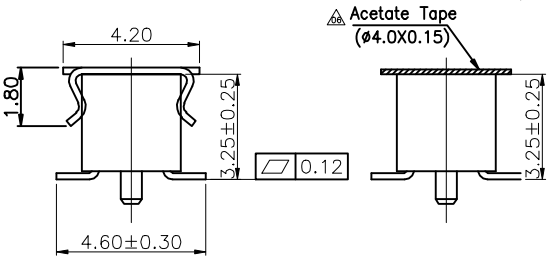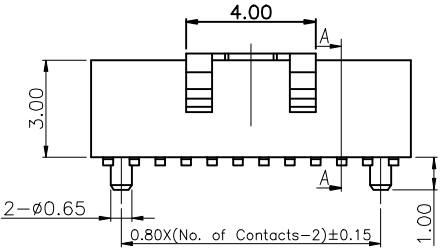

Recommended P.C.Board
Layout

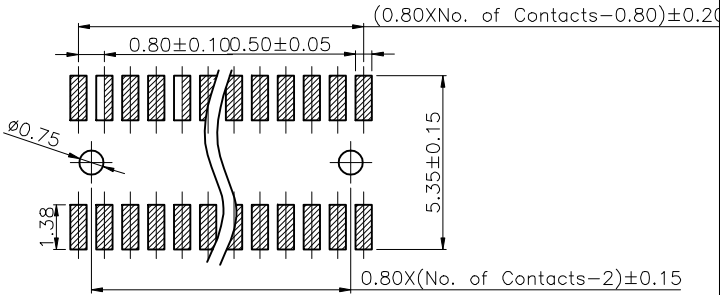

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE
1.0	mm	1:1

GENERAL TOLERANCE	
XL ±5°	.X ±
X ±5°	.X ±0.38
XX ±5°	.XX ±0.38
XXX ±5°	.XXX ±0.38

DRAWN	DATE
ANDY	20171208
CHECK	DATE
APPROVE	DATE

DWG. NO.	PART. NO.
	CNT-F080-2*XX-GS-300/4.6-P-TR

TITLE
double Row SMT Type