
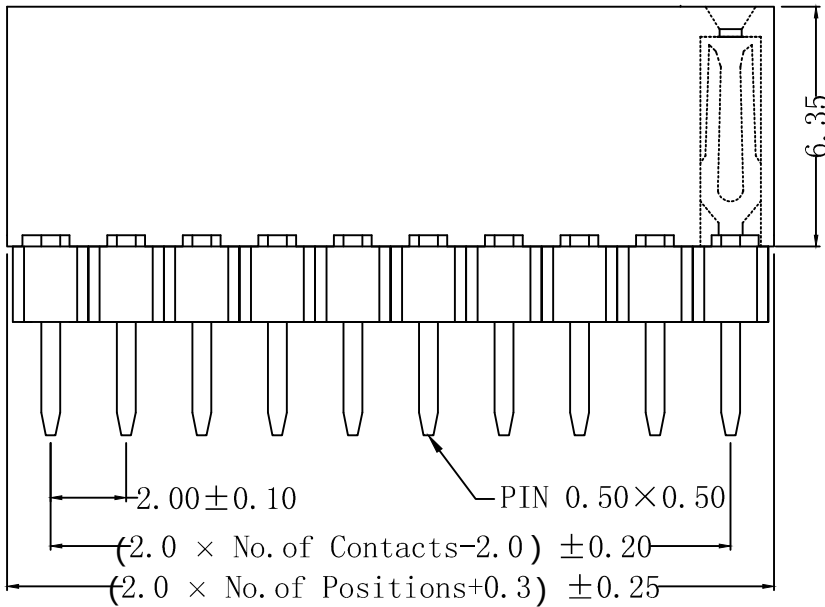
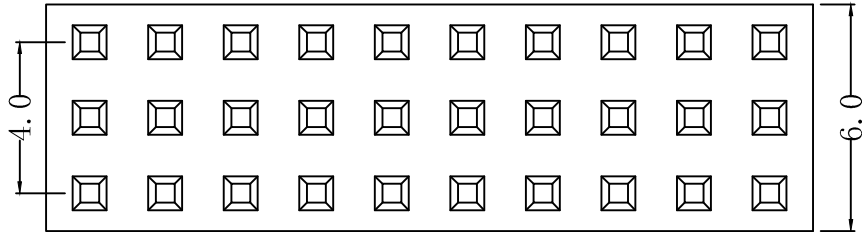


SPECIFICATIONS

- Current Rating:2.0 Amps
Insulator resistance:1000MΩ Min.
Dielectric withstanding:AC 500V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C
- ### MATERIALS
- Contact Material:Copper Alloy
Insulator Material:High Temperature Thermoplastic,UL 94V-0 Nylon
Finish:Gold/Tin Plated over Nickle
All materials must meet RoHS requirements

Recommended P.C. Board Hole Layout

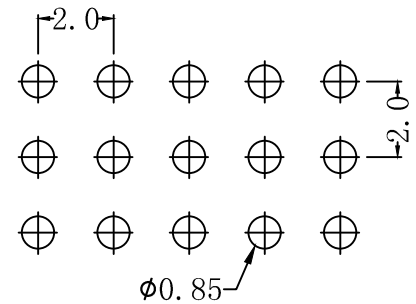

Ordering Information

CNT - F200 - 3*XX - GS - H/B

A

B

H

E

F

W

Female header

Pitch 2.00mm

No. of Pins per Row

Gold Plated &Straight

Custom Length Available

CNT肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE 2.00mm Female Header Triple Row Straight Type
				X. ° ±5°	X. ±0.30				
				. X° ±3°	. X ±0.38	CHECK 王芳芳	DATE 20190321	PART. NO. CNT-F200-3*XX-GS-H/B	
REV. 1.0	UNIT mm	SCALE 1:1		. XX° ±2°	. XX ±0.25				
				. XXX° ±1°	. XXX ±0.15				