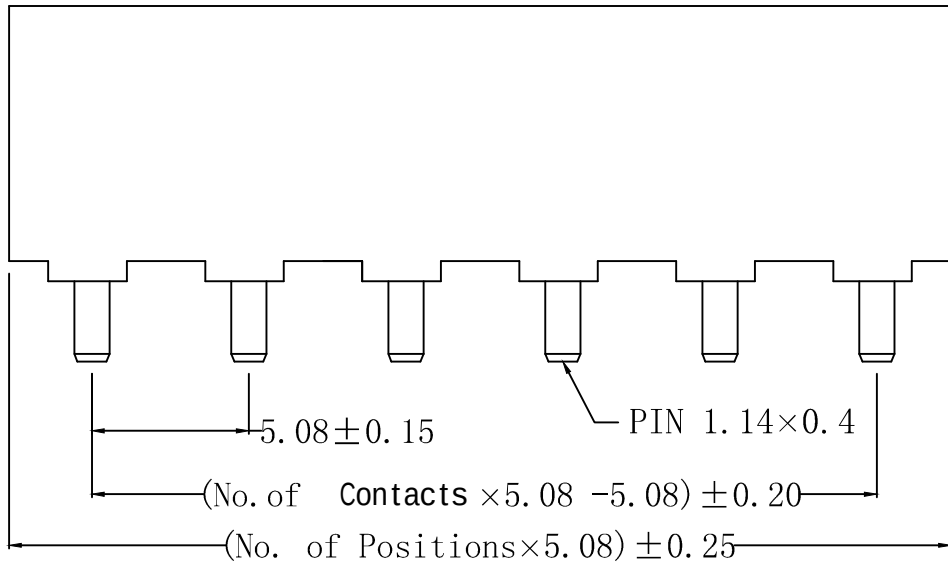
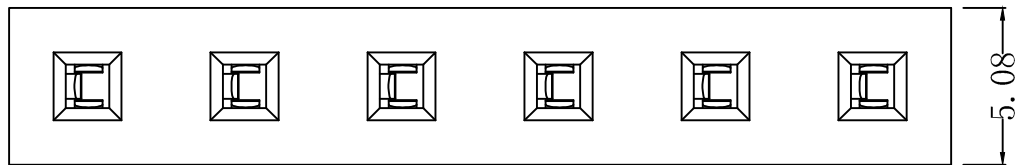


SPECIFICATIONS

Current Rating:7.9 Amps

Insulator resistance:1000 mΩ Min.

Dielectric withstanding:AC/DC 1000 V

Contact Resistance:30mΩ Max

Operating Temperature:-40° C - +105° C

MATERIALS


Contact Material:Brass

Insulator Material:High Temperature Thermoplastic, UL94V-0 LCP

Finish:Tin Plated over nickel

All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

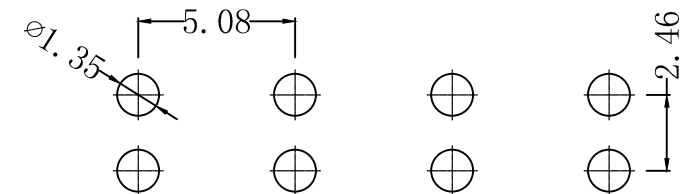

Ordering Information

CNT - F508 - 1*XX - TS - 890

Female Pitch No. of Pins Tin Plated Custom
header 5.08mm per Row &Straight Length
Available

A		E	
B	2.60	F	
H	8.90	W	

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE		
				X. ° ± 5°	X. ± 0.30	董道丽	20190325				
				. X° ± 3°	. X ± 0.25	CHECK	王芳芳	DATE		20190325	
				. XX° ± 2°	. XX ± 0.15	王元中	DATE	20190325		PART. NO.	5.08 PITCH POWER SOCKETS DIP TYPE
REV. 1.0	UNIT mm	SCALE 1:1		. XXX° ± 1°	. XXX ± 0.10			CNT-F508-1*XX-TS-890			