
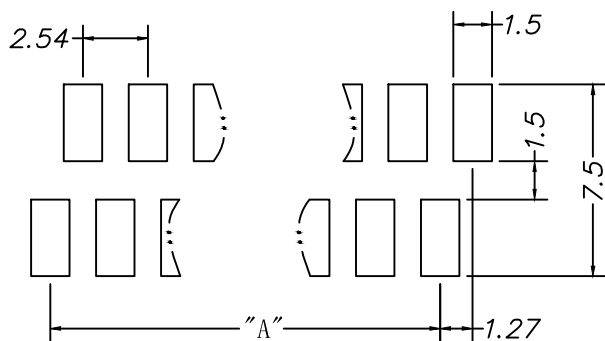
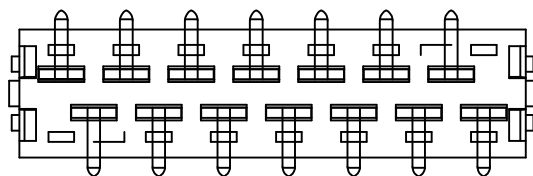

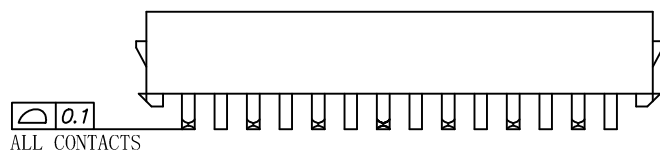



RoHS

REV	DESCRIPTION	DATE

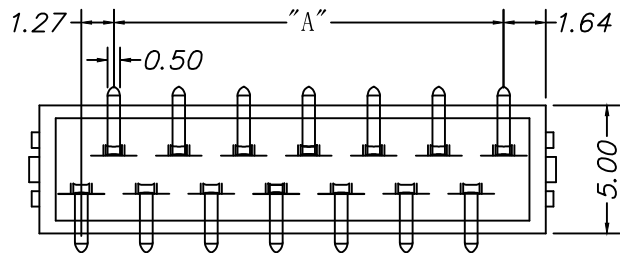

Recommended P. C. Board Layout

MATERIAL&FINISH
 Insulator: PA9T UL 94V-0
 Contact: Brass
 Contact: Sn Over Ni.

ELECTRICAL CHARACTERISTICS:
 Current Rating: 1 Amp
 Contact Resistance: 20MΩ Max.
 Withstanding Voltage: 500V AC/Min
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -40°C ~ +105°C

POLES	DIM.A	Q'ty/Tube
2* 04	2.54	68
2* 06	5.08	52
2* 08	7.62	42
2* 10	10.16	36
2* 12	12.7	31
2* 14	15.24	27
2* 16	17.78	24
2* 18	20.32	22
2* 20	22.86	20
2* 22	25.40	18
2* 24	27.94	17
2* 26	30.48	16

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN 董道丽	DATE 20210621	DWG. NO. 20210621003	TITLE 1.27*1.5mm IDC公头 (SMT-4.6型) 无槽 (大红)
				X.° ±5°	X. ±0.30				
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.25	APPROVE 王元中	DATE 20210621	PART. NO. CNT-FD127-2XX-TM	
				.XX° ±2°	.XX ±0.15				
				.XXX° ±1°	.XXX ±0.10				