
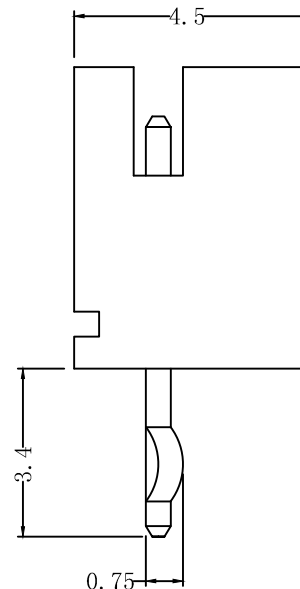
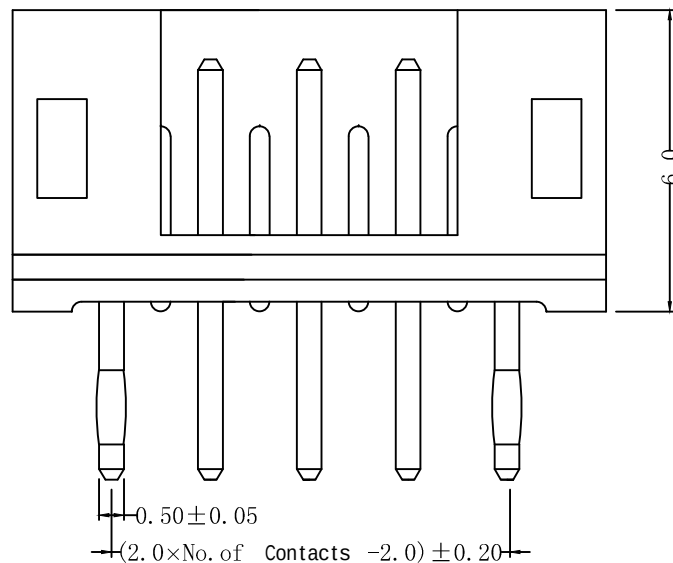


REV	DESCRIPTION	DATE

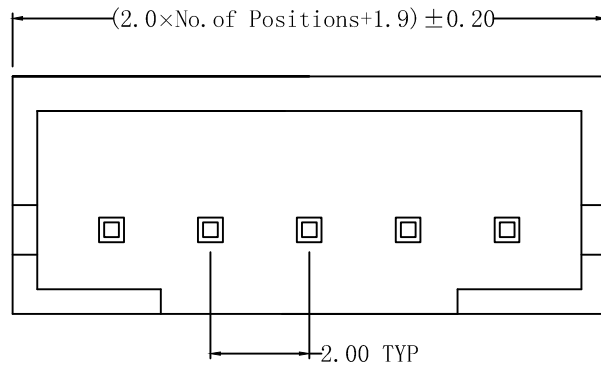

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25 $^{\circ}$ C TO +85 $^{\circ}$ C
- Applicable PC board thickness: 0.031"–0.063"
(0.8mm–1.6mm)
- Contact resistance: Initial Value/10m Ω max
After environmental
Texting/20m Ω
- Material: Nylon 66, UL94V-0

 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE	
				X. ° ±5°	X. ±0.30	董道丽	20190329	PART. NO.		
				.X° ±3°	.X ±0.38	CHECK	王芳芳			20190329
				.XX° ±2°	.XX ±0.25	APPROVE	王元中			20190329
				.XXX° ±1°	.XXX ±0.15					CNT-W200-1XX-TS
REV. 1.0	UNIT mm	SCALE 1:1								