


REV	DESCRIPTION	DATE



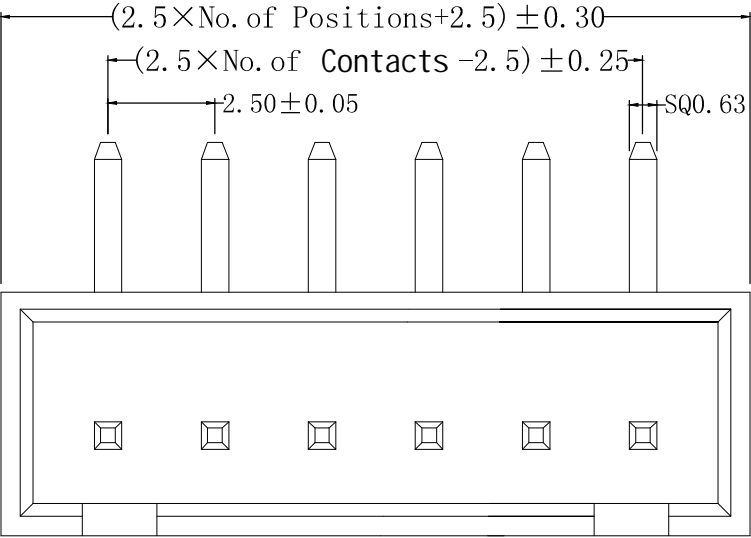


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating 3A, AC, DC
- Withstanding Voltage: 1,000V AC/minute
- Insulation resistance: 1,000MΩ min
- Temperature range: -25° C - +85° C
- Contact Resistance: 10mΩ max

■ WAFER

- Poles: 2-15
- Material: Nylon 66 UL94-V0

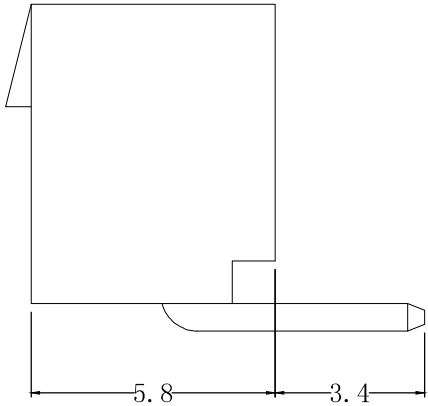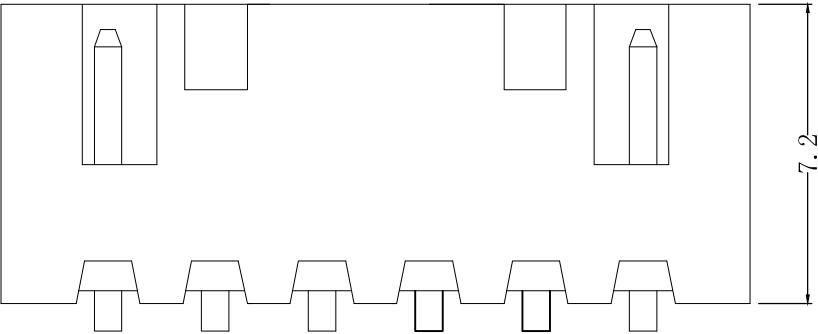

PCB安装尺寸图

<p>CNT 肯耐特电子有限公司</p>			GENERAL TOLERANCE		DRAWN 董道丽	DATE 20140420	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	CHECK 王芳芳	DATE 20140420	20140420001	
REV. 1.0	UNIT mm	SCALE 1:1	.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20140420	PART. NO.	2.5mm Wire to Board Connectors Wafer
			.XX° ±2°	.XX ±0.25			CNT-W250-1XX-TD-T	
			.XXX° ±1°	.XXX ±0.15				