
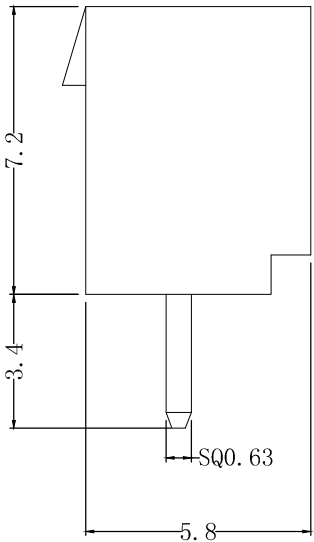
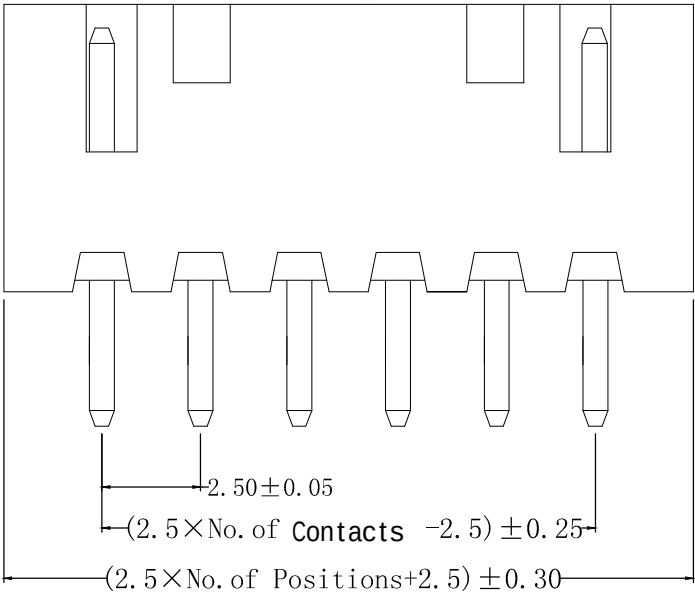


REV	DESCRIPTION	DATE

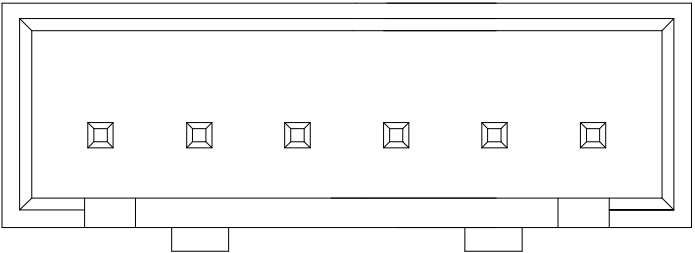


SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25℃ - +85℃
(including temperature rise in applying electrical current)
- Contact resistance: Initial Value/10mΩ max
After environmental Texting/20mΩ

WAFER

- Poles: 2-15
- Material: Nylon 66, UL94V-2
- Part No: CNT-XHS-XXA



PCB板安装尺寸

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X. ° ±5°	X. ±0.30	董道丽	20190329		
				. X° ±3°	. X ±0.38	王芳芳	20190329	PART. NO.	
REV. 1.0	UNIT mm	SCALE 1:1		. XX° ±2°	. XX ±0.25	APPROVE	DATE	CNT-W250-1XX-TS-T	
				. XXX° ±1°	. XXX ±0.15	王元中	20190329		
									2.50mm Wire to Board Connectors Wafer