
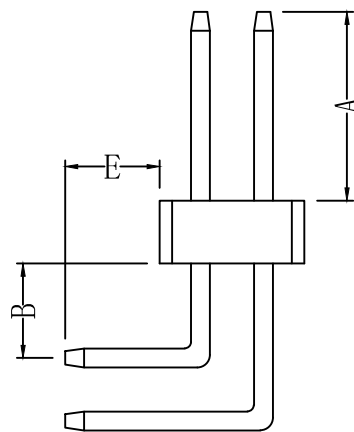
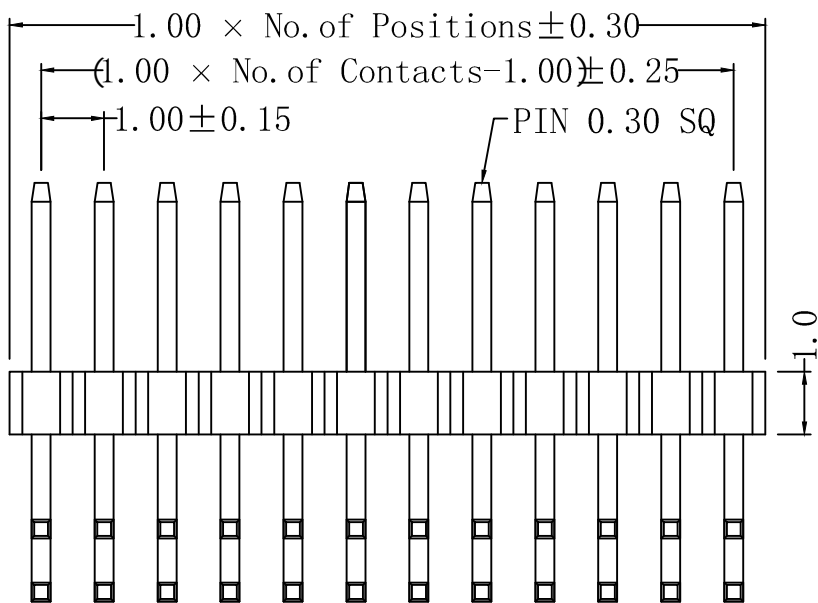


REV	DESCRIPTION	DATE

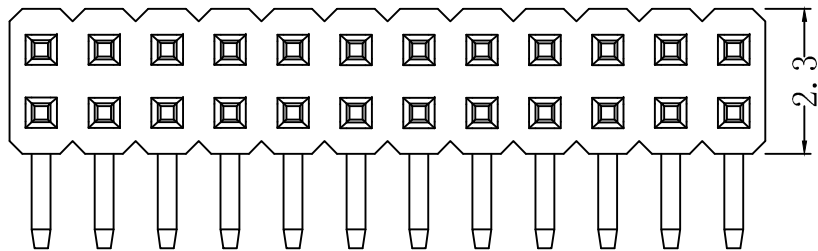


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000 mΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C


MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP
 Finish: Gold Plated over nikle
 All materials must meet RoHS requirements

Recommended P. C. Board
 Hole Layout

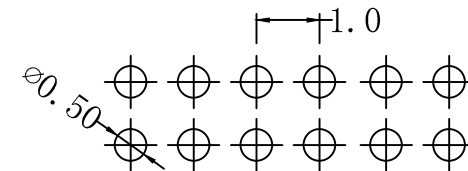

Ordering Information

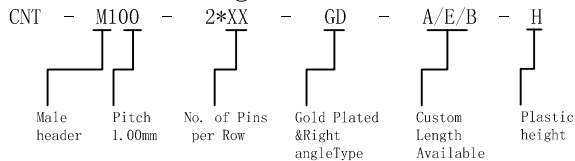

A		E	
B		F	
H	1.0	W	

CNT 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE	.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX° ±2°	.XX ±0.25	王芳芳	20190321		
			.XXX° ±1°	.XXX ±0.15	APPROVE	DATE	CNT-M100-2*xx-GD-A/E/B-H	
					王元中	20190321		1.0 Pin Header Dual Row Right Angle Type