

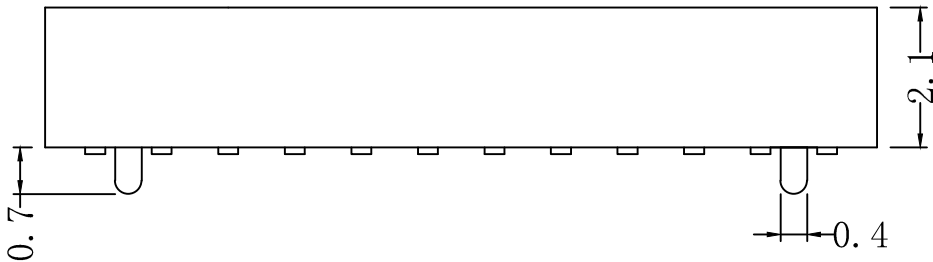


REV	DESCRIPTION	DATE

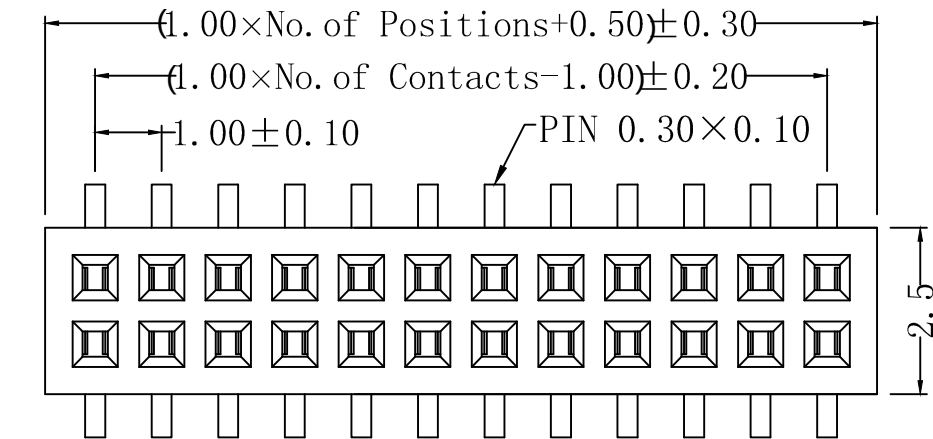


SPECIFICATIONS

Current Rating:1.0 Amps
Insulator resistance:1000 mΩ Min.
Dielectric withstanding:AC 300 V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:High Temperature Thermoplastic,UL 94V-0 LCP
Finish:Gold Plated over nikle
All materials must meet RoHS requirements

Recommended P.C. Board Hole Layout

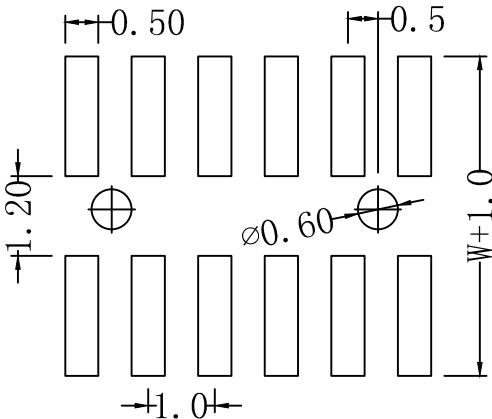

Ordering Information

CNT - F100 - 2*XX - GM - 210 - P

A		E	
B		F	
H	2.1	W	

Female header
Pitch 1.00mm
No. of Pins per Row
Gold Plated &S. M. T
Custom Length Available

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X. ° ±5°	X. ±0.30	董道丽	20190415		
				. X° ±3°	. X ±0.38	CHECK	王芳芳	20190415	
REV.	UNIT	SCALE		. XX° ±2°	. XX ±0.25	APPROVE	DATE	CNT-F100-2*XX-GM-210-P	
1.0	mm	1:1		. XXX° ±1°	. XXX ±0.15				