
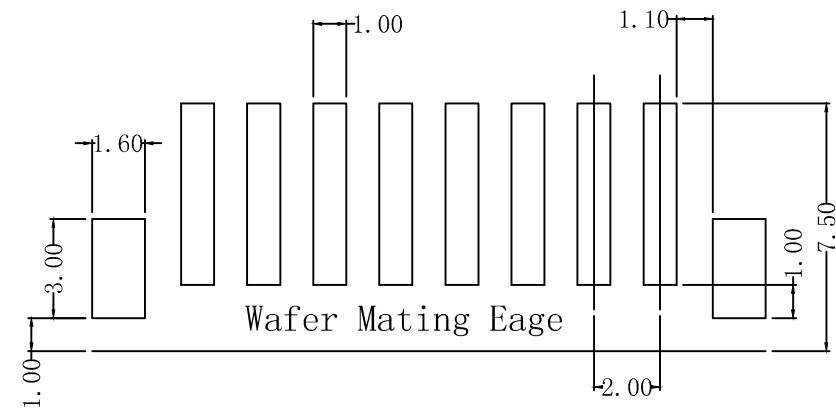
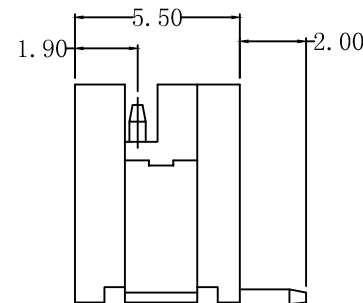
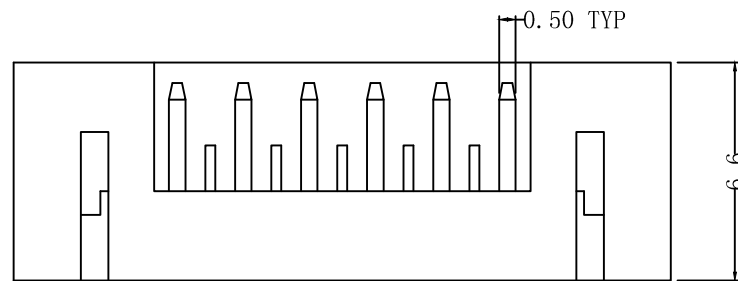


REV	DESCRIPTION	DATE

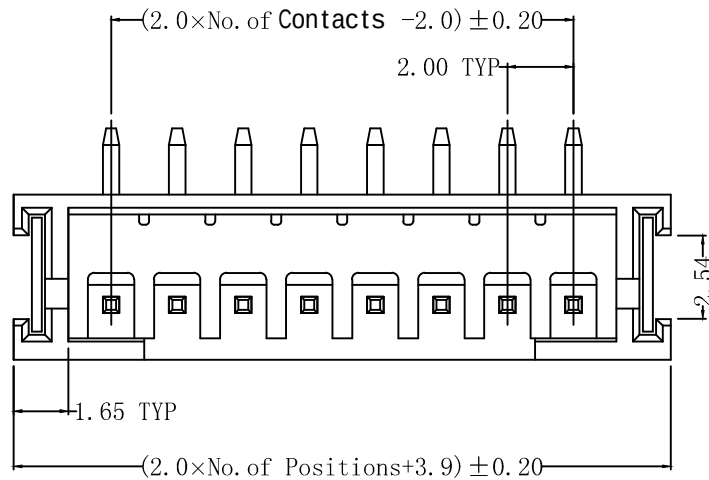

Recommand PCB Layout

■ SPECIFICATIONS

- Voltage rating: 100V AC/DC
- Current rating: 2A AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1,000M Ω min
- Temperature range: -25°C - $+85^{\circ}\text{C}$
- Contact Resistance: 20m Ω max

■ WAFER

- Material: Contact: Phos. Bronze, Tin Plated
Base: LCP UL94-V0
Resistance to soldering heat: $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$
 $5 \pm 0.5 \text{ sec}$
Storage humidity: 30%-70%
Storage time: semiannual

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE 2.00mm Crimp Style Connectors Wafer
				X. ° ±5°	X. ±0.30	董道丽	20190329		
				.X° ±3°	.X ±0.38	CHECK 王芳芳	DATE 20190329	PART. NO. CNT-W200-1XX-TSM	
				.XX° ±2°	.XX ±0.25	APPROVE 王元中	DATE 20190329		
				.XXX° ±1°	.XXX ±0.15				
REV. 1.0	UNIT mm	SCALE 1:1							