


REV	DESCRIPTION	DATE


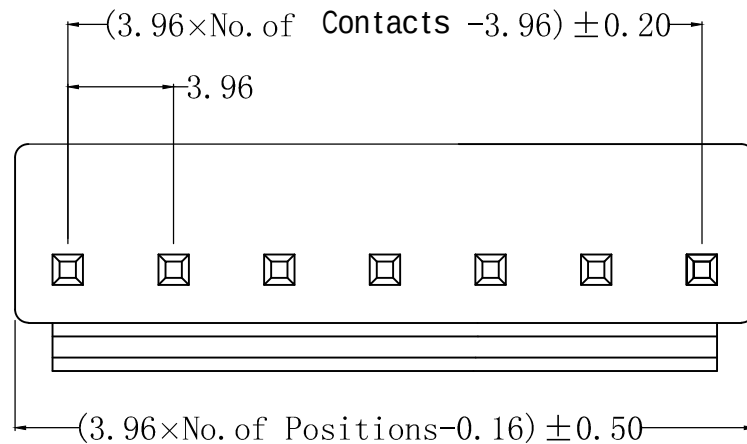


SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C - +85° C
- Applicable PC board thickness: 0.063 (1.6mm)
- Contact resistance: Initial Voice/10m Ω max
After environmental
Testing/20m Ω max

WAFER

- Poles: 2-12
- Material: Nylon 66, UL94V-0
- Q'TY: 500, 1000 pcs/bag

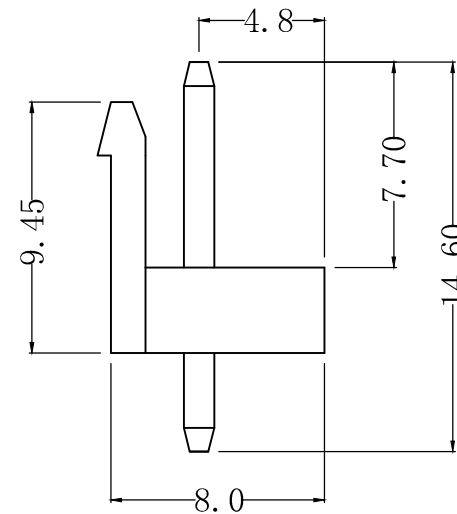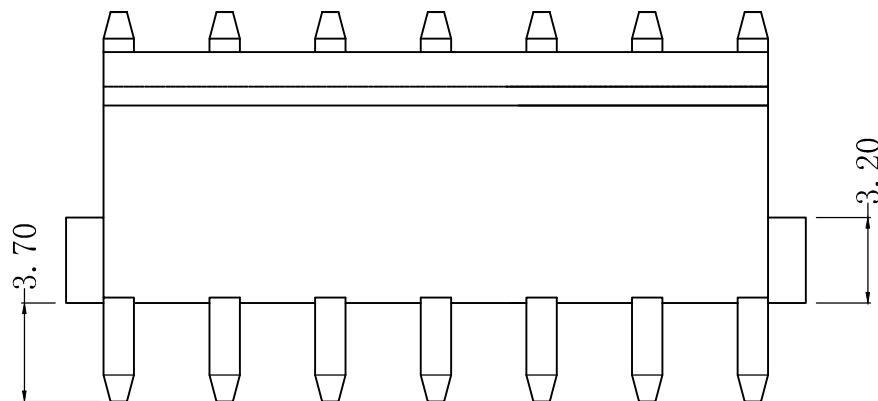

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE 3.96mm Disconnectable crimp style Wafer
				X. ° ±5°	X. ±0.30	董道丽	20190329		
				.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO. CNT-W396-1XX-TS-945	
				.XX° ±2°	.XX ±0.25	王芳芳	20190329		
REV. 1.0	UNIT mm	SCALE 1:1		.XXX° ±1°	.XXX ±0.15	王元中	20190329		