

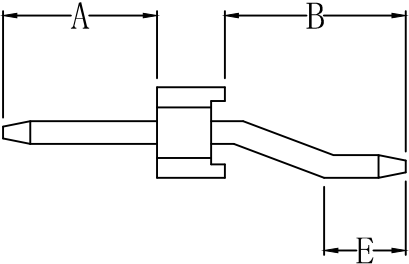



REV	DESCRIPTION	DATE

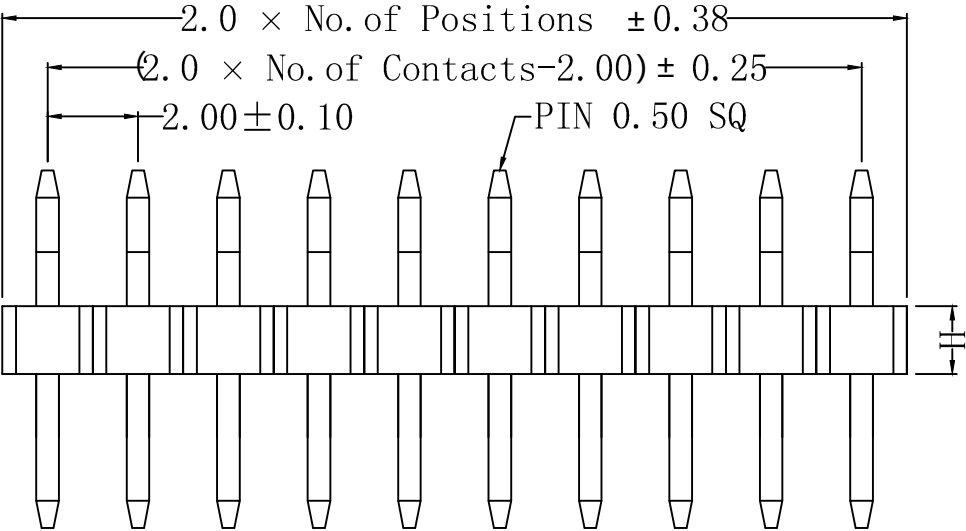

Recommended P.C. Board
Hole Layout

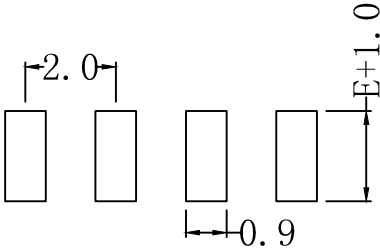

Ordering Information

CNT - M200 - 1*XX - GDM - A/B/E

Male header Pitch 2.00mm No. of Pins per Row Gold Plated &S. M. T Custom Length Available

A		E	
B		F	
H		W	

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE		
				X. ° ±5°	X. ±0.30	董道丽	20190321				
				. X° ±3°	. X ±0.38	CHECK	王芳芳	DATE		20190321	PART. NO.
				. XX° ±2°	. XX ±0.25	APPROVE	王元中	DATE		20190321	CNT-M200-1*xx-GDM-A/B/E
REV.	UNIT	SCALE		. XXX° ±1°	. XXX ±0.15				2.0mm Pin Header Single Row Right Angle SMT		
1.0	mm	1:1									

SPECIFICATIONS

Current Rating:2.0 Amps
Insulator resistance:1000MΩ Min.
Dielectric withstanding:AC 500V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:High Temperature Thermoplastic,UL 94V-0 Nylon
Finish:Gold/Tin Plated over Nickle
All materials must meet RoHS requirements