
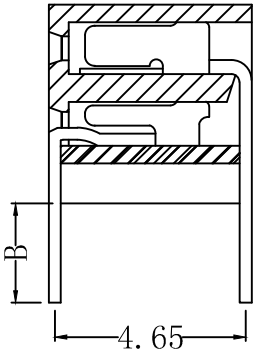
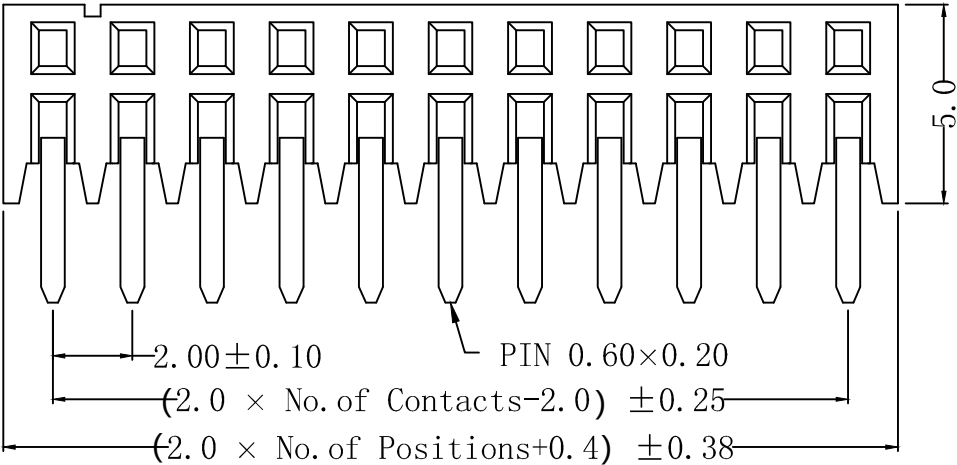


REV	DESCRIPTION	DATE

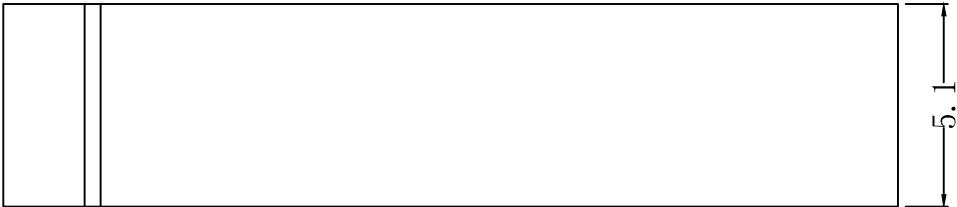


SPECIFICATIONS

Current Rating:2.0 Amps
Insulator resistance:1000MΩ Min.
Dielectric withstanding:AC 500V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:High Temperature
Thermoplastic,UL 94V-0 Nylon
Finish:Gold/Tin Plated over Nickle
All materials must meet RoHS requirements

Recommended P. C. Board
Hole Layout

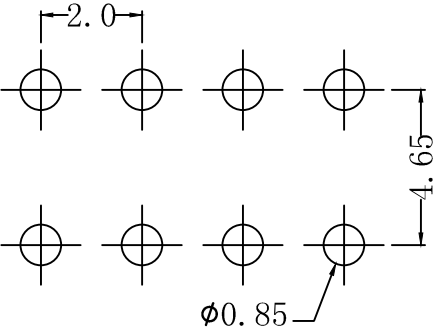

Ordering Information

CNT - F200 - 2*XX - GSC - 500

Female header Pitch 2.00mm No. of Pins per Row Gold Plated &Straight Custom Length Available

A		E	
B		F	
H	5.0	W	

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X. ° ±5°	X. ±0.30	董道丽	20190321		
				. X° ±3°	. X ±0.38	王芳芳	20190321	PART. NO.	
				. XX° ±2°	. XX ±0.25	王元中	20190321	CNT-F200-2XX-GSC-500	
REV. 1.0	UNIT mm	SCALE 1:1		. XXX° ±1°	. XXX ±0.15				2.00mm Female Header Side Entry Right AngleType