RoHS 参考图面

REV	DESCRIPTION	DATE

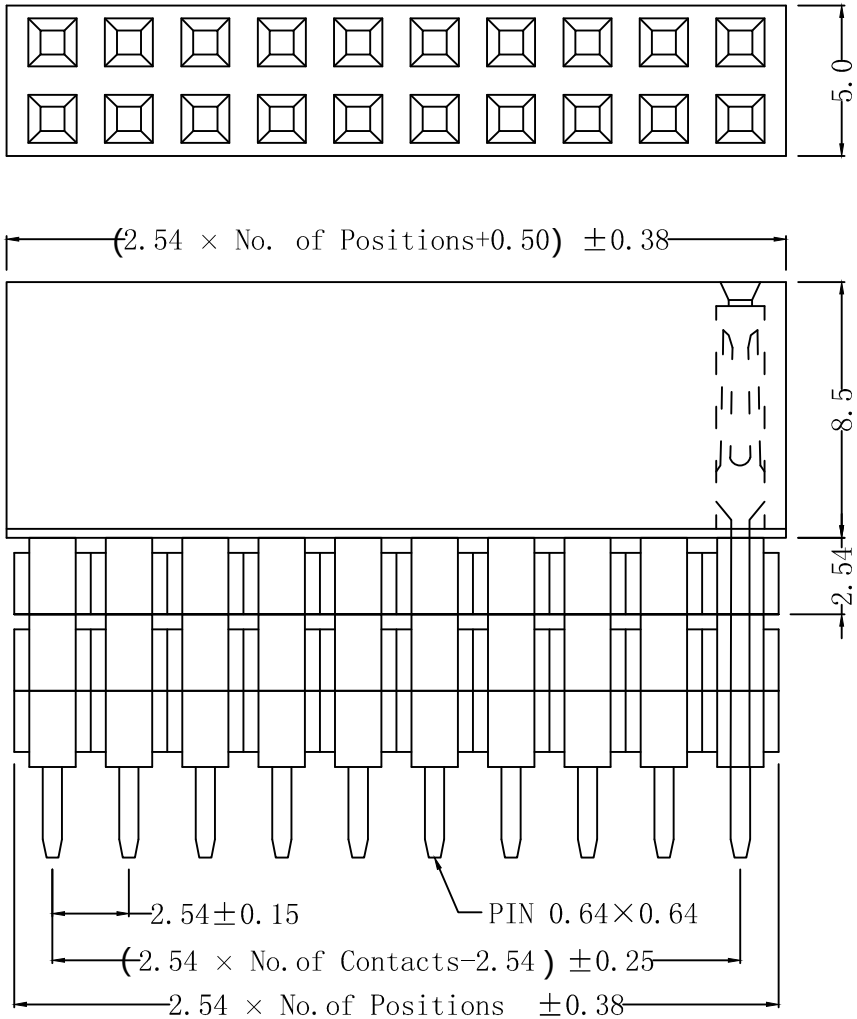

SPECIFICATIONS

Current Rating:3.0 Amps
Insulator resistance:1000MΩ Min.
Dielectric withstanding:AC 600V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:Thermoplastic,UL 94V-0 PBT
Finish:Gold/Tin Plated over Nickle
All materials must meet RoHS requirements

Recommended P.C.Board
Hole Layout

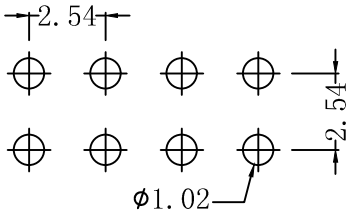

Ordering Information

CNT - F254 - 2*XX - GS - H/3.0 - Y

- CNT: Female header
- F254: Pitch 2.54mm
- 2*XX: No. of Pins per Row
- GS: Gold Plated &Straight
- H/3.0: Custom Length Available
- Y

A		E	
B		F	
H	8.5	W	

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE
1.0	mm	1:1

GENERAL TOLERANCE			
X.°	±5°	X.	±0.30
.X°	±3°	.X	±0.38
.XX°	±2°	.XX	±0.25
.XXX°	±1°	.XXX	±0.15

DRAWN	董道丽	DATE 20190321
CHECK	王芳芳	DATE 20190321
APPROVE	王元中	DATE 20190321

DWG. NO.

PART. NO. CNT-F254-2*xx-GS-H/B-Y

TITLE

2.54*2.54 Female Header
Dual Row Elevated Type