
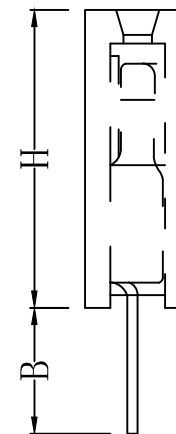
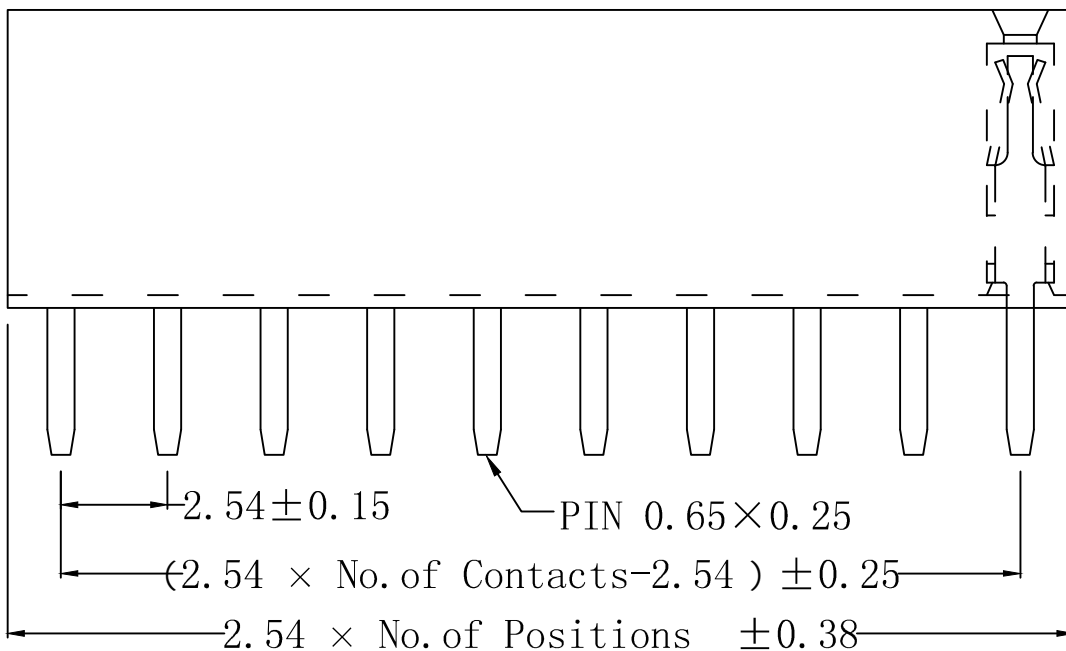


REV	DESCRIPTION	DATE




SPECIFICATIONS

Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: Thermoplastic, UL 94V-0 PBT
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board
Hole Layout

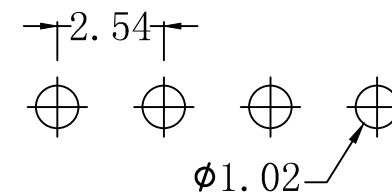

Ordering Information

CNT - F254 - 1*XX - GS - H/3.0-U



A		E	
B		F	
H	7.1	W	

CNT 肯耐特电子有限公司				GENERAL	TOLERANCE	DRAWN	董道丽	DATE	20190327	DWG. NO.	TITLE	
				.X°	±5°	.X	±0.30	CHECK	王芳芳	DATE		20190327
REV.	UNIT	SCALE	⊕	.X°	±3°	.X	±0.38	APPROVE	王元中	DATE		20190327
1.0	mm	1:1		.XX°	±2°	.XX	±0.25					2.54mm Female Header Single Row Straight
				.XXX°	±1°	.XXX	±0.15					