
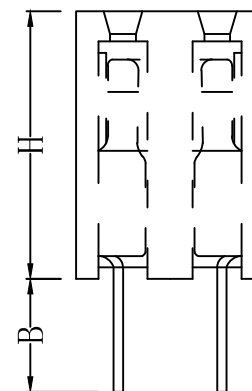
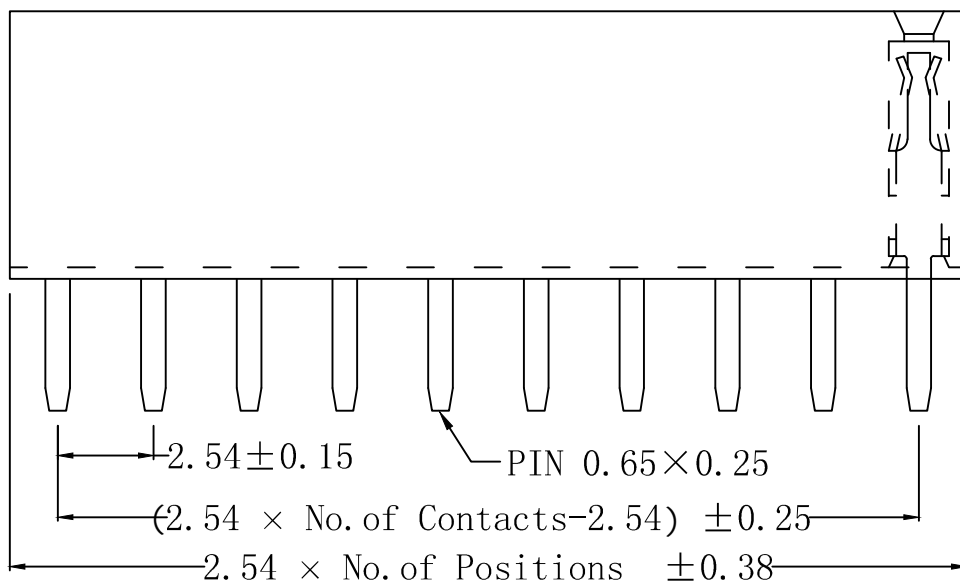


REV	DESCRIPTION	DATE

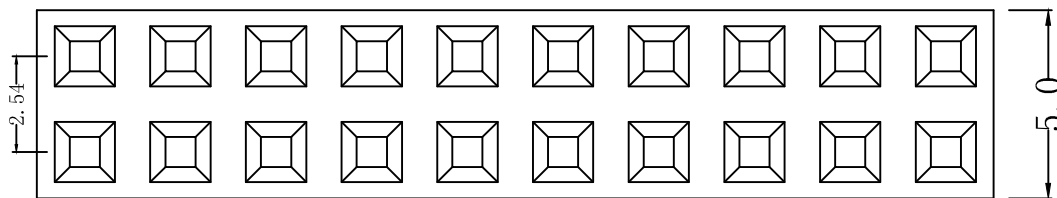


### SPECIFICATIONS

Current Rating: 3.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 600V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: Thermoplastic, UL 94V-0 PBT  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements


### Recommended P. C. Board Hole Layout

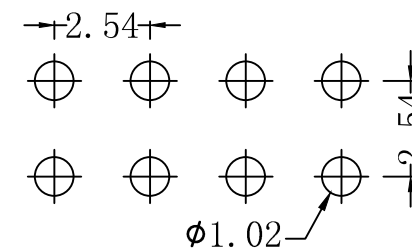

### Ordering Information

CNT - F254 - 2\*XX - GS - H/3.0-U

A	E
B	F
H	7.1



<b>CNT</b> 肯耐特电子有限公司 REV. 1.0 UNIT mm SCALE 1:1		GENERAL TOLERANCE	DRAWN 董道丽	DATE 20190327	DWG. NO.	TITLE 2.54mm Female Header Dual Row Straight
		.X° ±5° .X ±0.30	CHECK 王芳芳	DATE 20190327	PART. NO.	
		.XX° ±3° .X ±0.38	APPROVE 王元中	DATE 20190327	CNT-F254-2*XX-GS-H/B-U	
		.XX° ±2° .XX ±0.25				
		.XXX° ±1° .XXX ±0.15				