


REV	DESCRIPTION	DATE

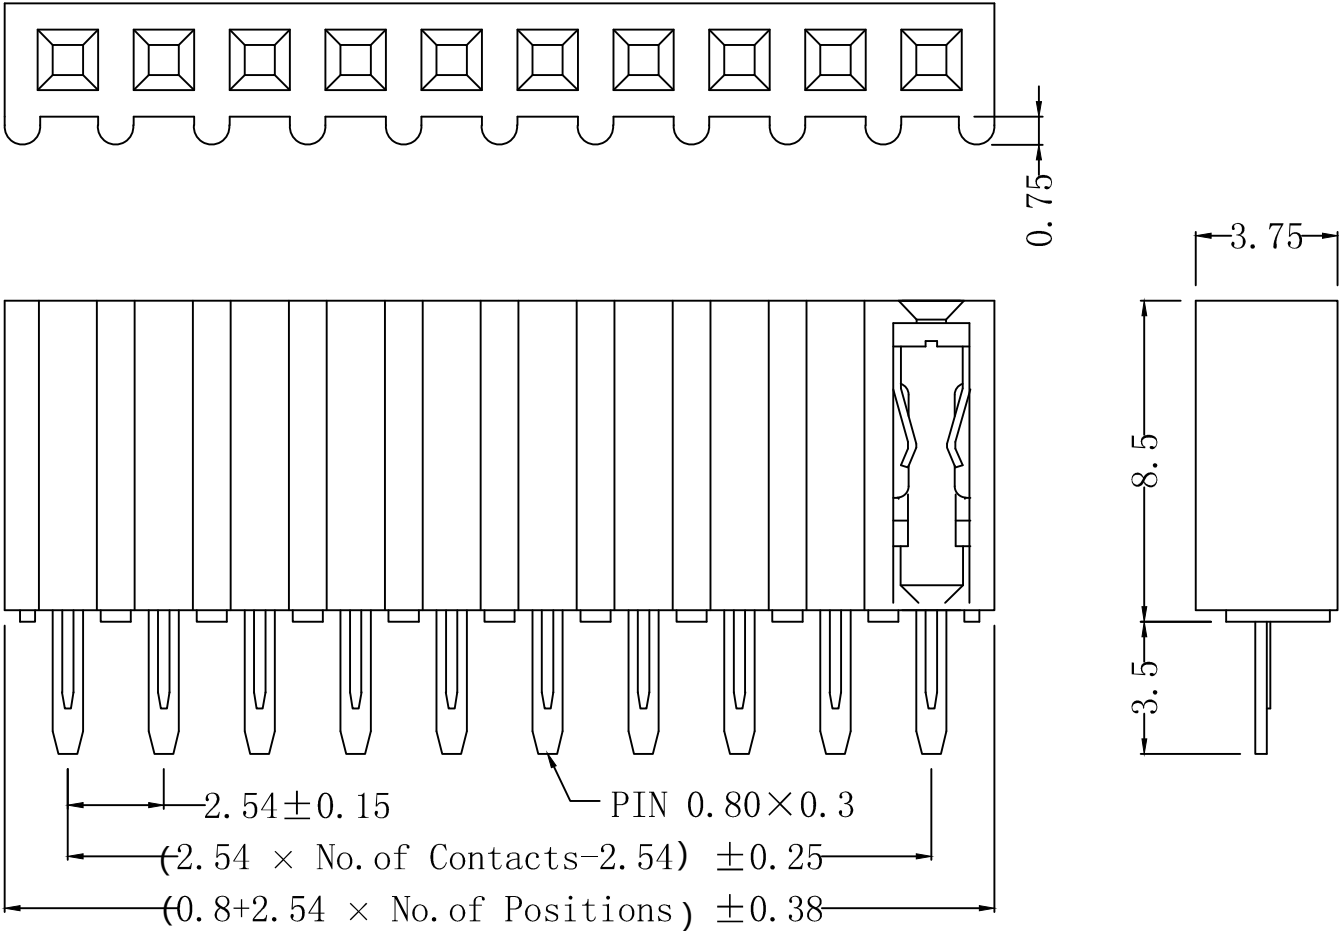


SPECIFICATIONS

Current Rating:3.0 Amps
Insulator resistance:1000MΩ Min.
Dielectric withstanding:AC 600V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:Thermoplastic,UL 94V-0 PBT
Finish:Gold/Tin Plated over Nickle
All materials must meet RoHS requirements

Recommended P. C. Board
Hole Layout



Ordering Information

CNT - F254 - 1*XX - GS - 8.5/3.5 - 0

Female header Pitch 2.54mm No. of Pins per Row Gold Plated &Straight Custom Length Available

A		E	
B		F	
H	8.5	W	

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X. ° ±5°	X. ±0.30	董道丽	20190327		
				. X° ±3°	. X ±0.38	王芳芳	20190327		
				. XX° ±2°	. XX ±0.25	王元中	20190327		
REV.	UNIT	SCALE		. XXX° ±1°	. XXX ±0.15	PART. NO.		2.54mm Female Header Single Row Straight	
1.0	mm	1:1				CNT-F254-1*XX-GS-8.5/3.5-0			