
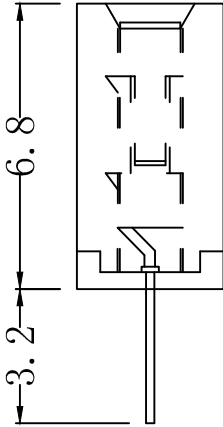
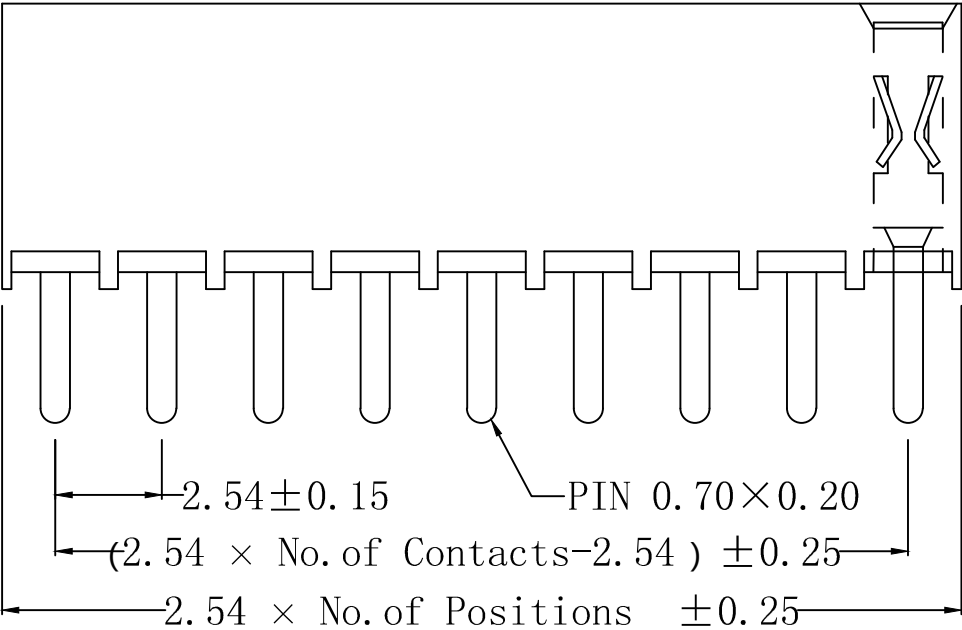


REV	DESCRIPTION	DATE

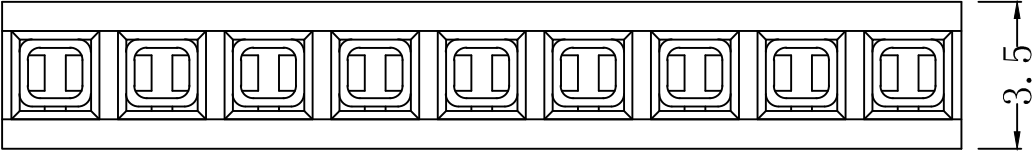


SPECIFICATIONS

Current Rating:3.0 Amps
Insulator resistance:1000MΩ Min.
Dielectric withstanding:AC 600V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:Thermoplastic,UL 94V-0 PBT
Finish:Gold/Tin Plated over Nickle
All materials must meet RoHS requirements

Recommended P.C. Board
Hole Layout

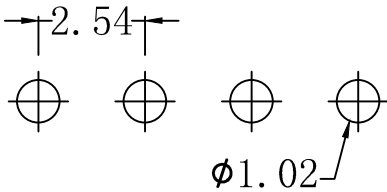

Ordering Information

CNT - F254 - 1*XX - GS - 6.8/3.2 - □

A		E	
B		F	
H	6.8	W	

Female header	Pitch 2.54mm	No. of Pins per Row	Gold Plated &Straight	Custom Length Available
---------------	--------------	---------------------	-----------------------	-------------------------

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE 2.54mm Female Header Single Row Straight
				X. ° ±5°	X. ±0.30	董道丽	20190327		
				. X° ±3°	. X ±0.38	CHECK	DATE		
						王芳芳	20190327	PART. NO.	
REV. 1.0	UNIT mm	SCALE 1:1		. XX° ±2°	. XX ±0.25	APPROVE	DATE	CNT-F254-1*XX-GS-6.8/3.2-□	
				. XXX° ±1°	. XXX ±0.15	王元中	20190327		