
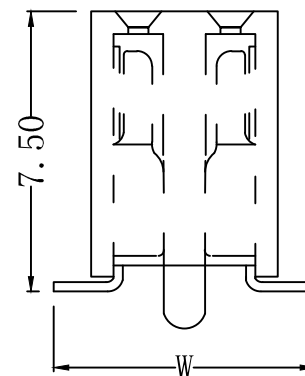
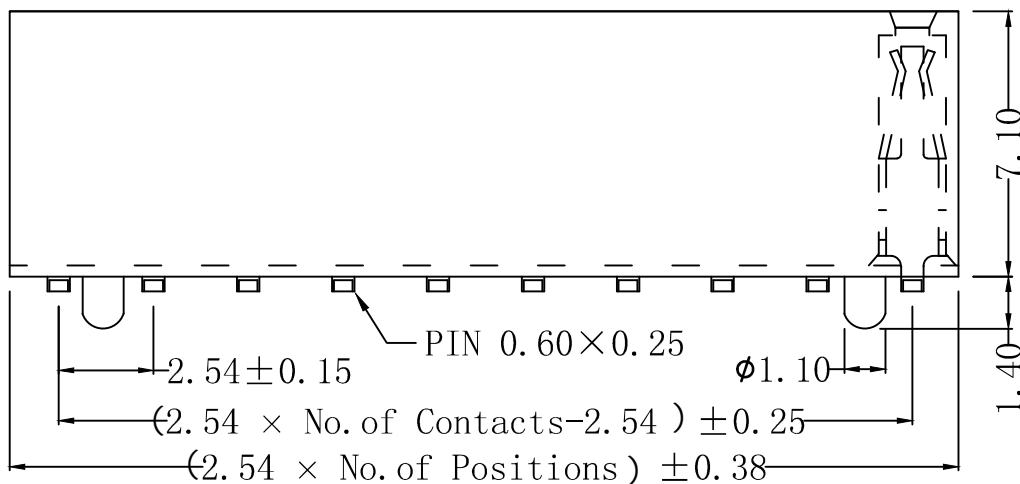


REV	DESCRIPTION	DATE

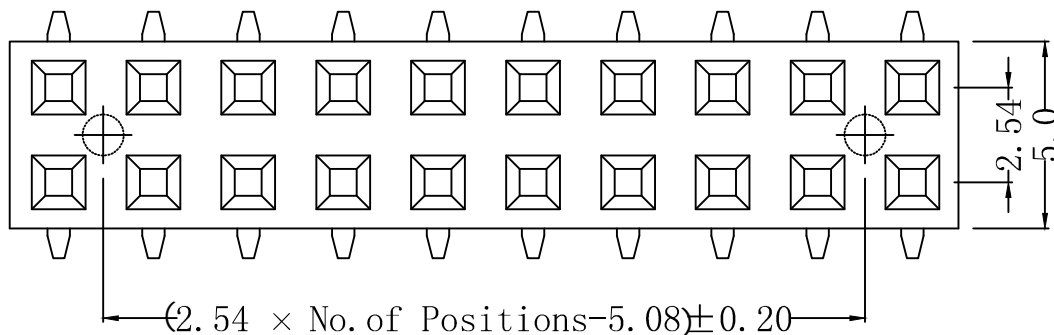


SPECIFICATIONS

Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

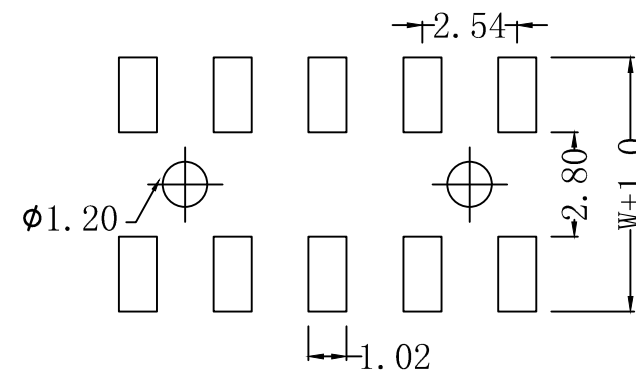

Ordering Information

CNT - F254 - 2*XX - GM - H/W - P

Female header Pitch 2.54mm No. of Pins per Row Gold Plated & S.M.T Custom Length Available

A	E
B	F
H	W

CNT 肯耐特电子有限公司			GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5° X. ±0.30	董道丽	20190321		
REV. 1.0 UNIT mm SCALE 1:1			.X° ±3° .X ±0.38	CHECK	DATE	PART. NO.	2.54*2.54 Female Header Dual Row SMT
			.XX° ±2° .XX ±0.25	王芳芳	20190321		
			.XXX° ±1° .XXX ±0.15	APPROVE	DATE	CNT-F254-2*XX-GM-710/W-P	
			王元中	20190321			