RoHS 参考图面

REV	DESCRIPTION	DATE

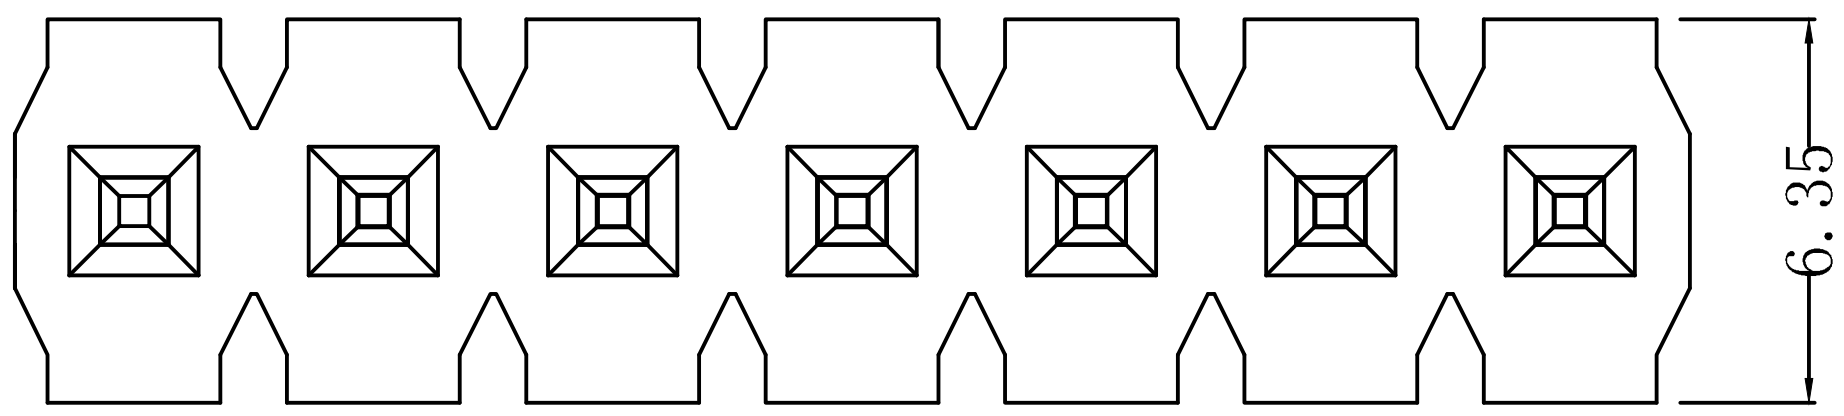

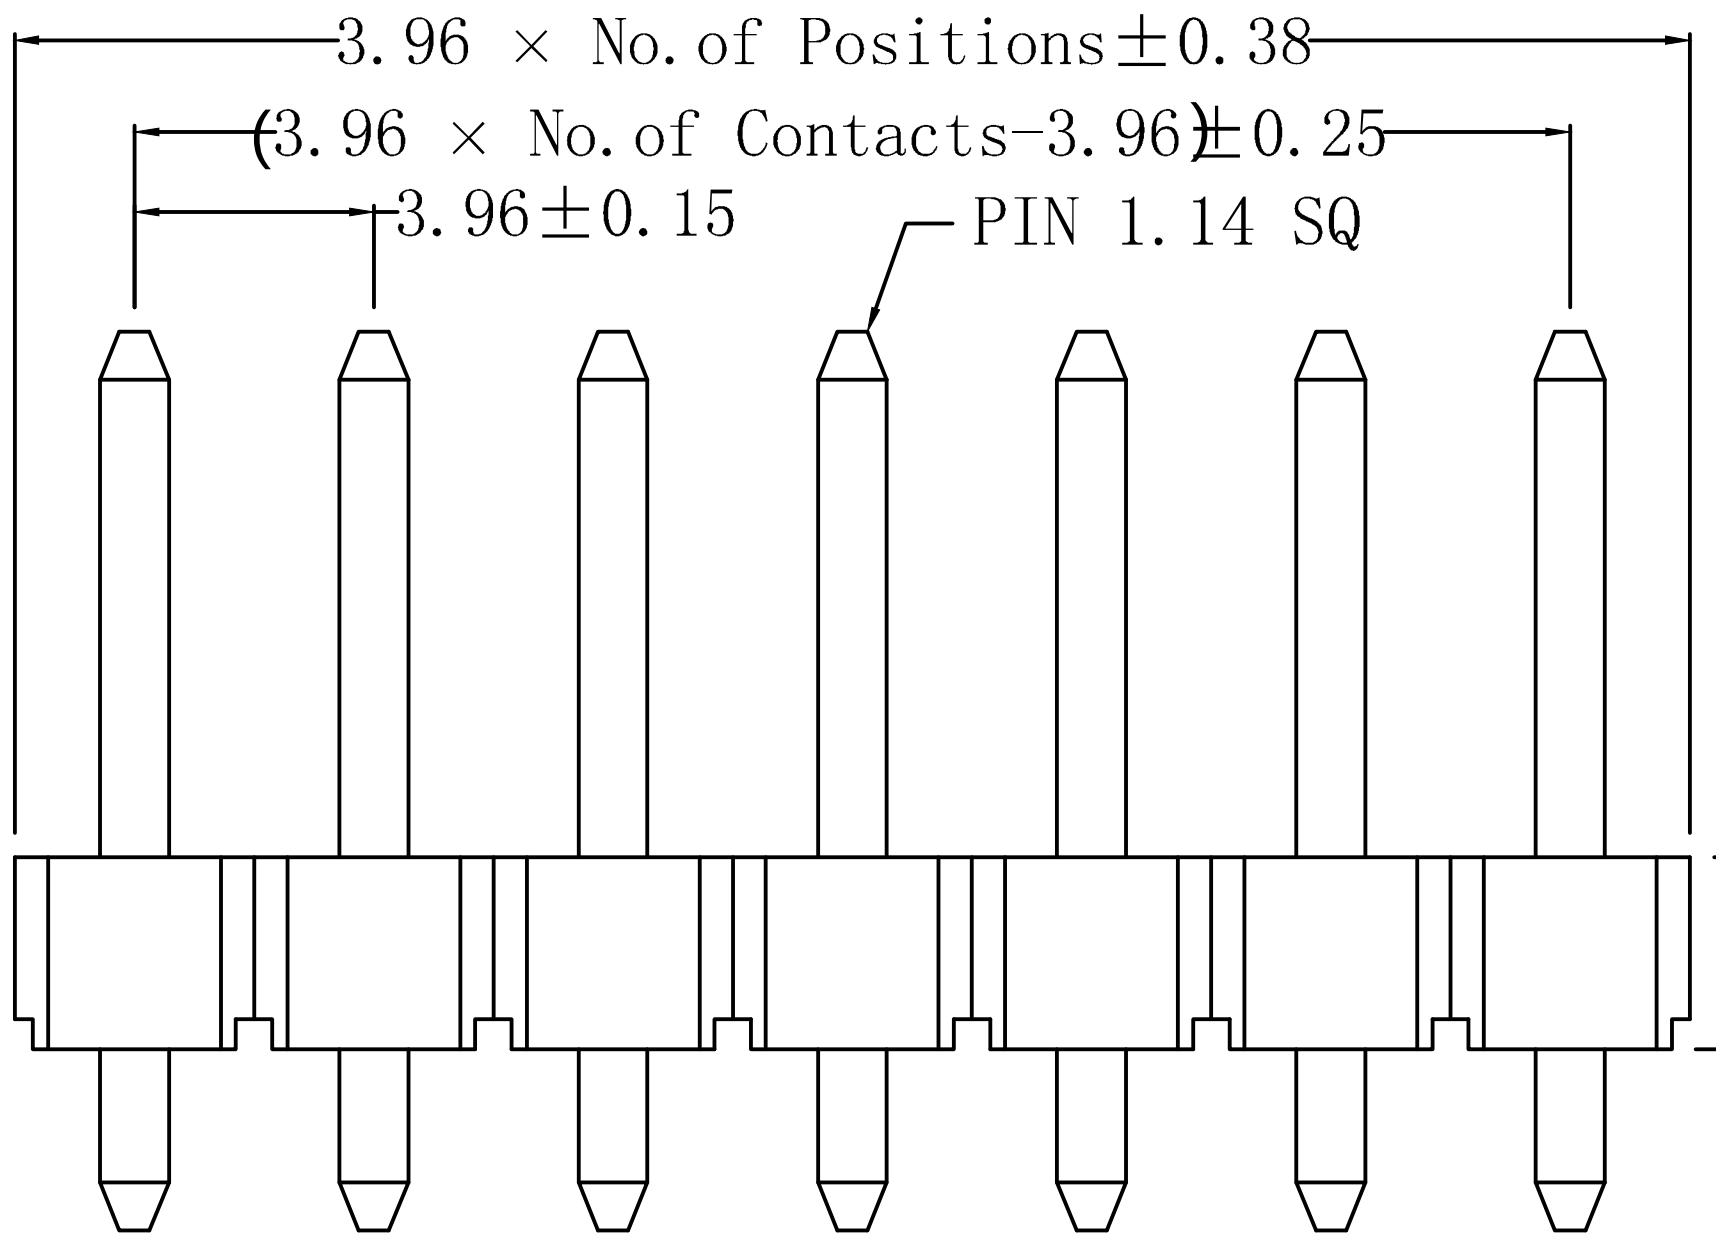

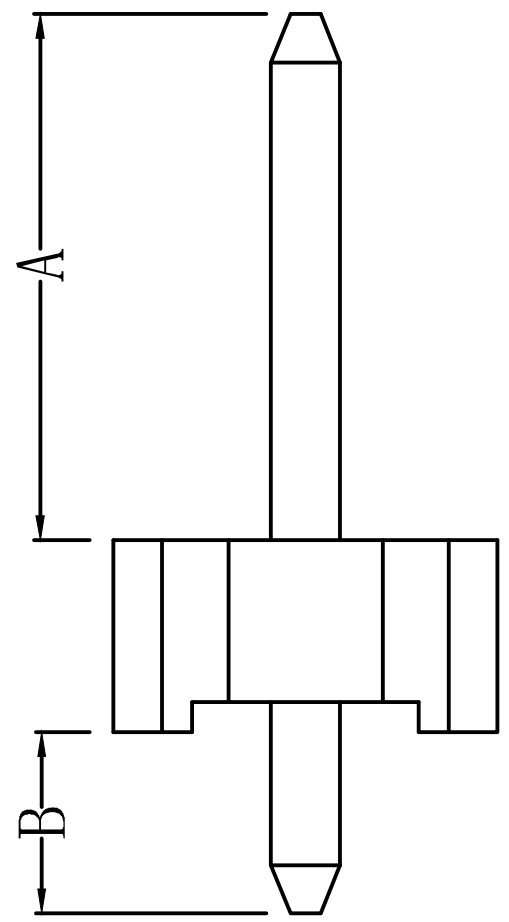

SPECIFICATIONS

Current Rating:7.9 Amps

Insulator resistance:1000 mΩ Min.

Dielectric withstanding:AC/DC 1500 V

Contact Resistance:20mΩ Max

Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Brass

Insulator Material:High Temperature Thermoplastic,LCP UL94V-0

Finish:Tin Plated over nickel

All materials must meet RoHS requirements

Recommended P.C.Board Hole Layout

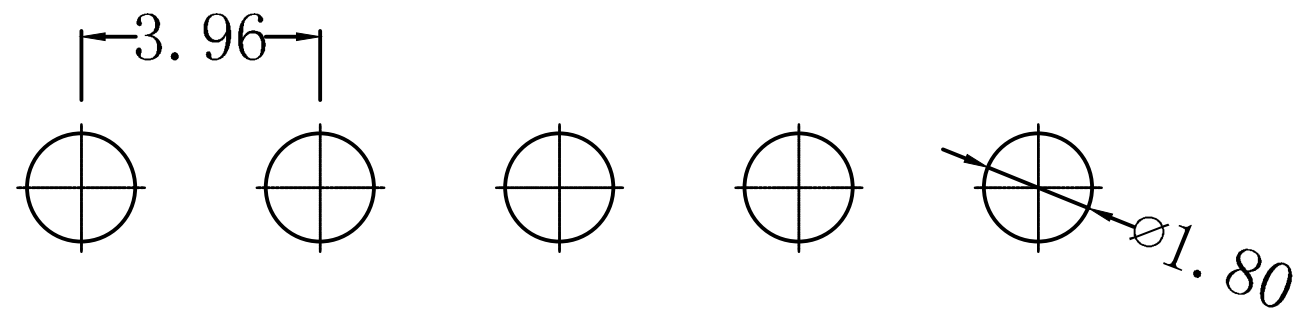

Ordering Information

CNT - M396 - 1*XX - TS - A/B - H

- M396: Male header / Pitch 3.96mm
- 1*XX: No. of Pins per Row
- TS: Tin Plated &Straight
- A/B: Custom Length Available
- H: Plastic height

A		E	
B		F	
H	3.18	W	

CNT 肯耐特电子有限公司			GENERAL TOLERANCE				DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE
			X.°	±5°	X.	±0.30				3.96mm Pin Header Board Spacer Single Row Straight
			.X°	±3°	.X	±0.38	CHECK 王芳芳	DATE 20190321	PART.NO.	
REV. 1.0	UNIT mm	SCALE 1:1	.XX°	±2°	.XX	±0.25	APPROVE 王元中	DATE 20190321	CNT-M396-1*xx-TS-A/B	
			.XXX°	±1°	.XXX	±0.15				