
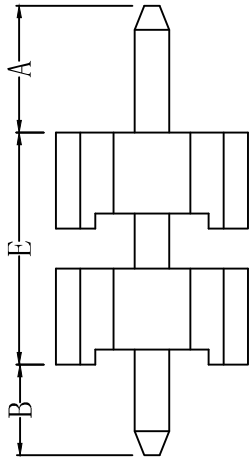
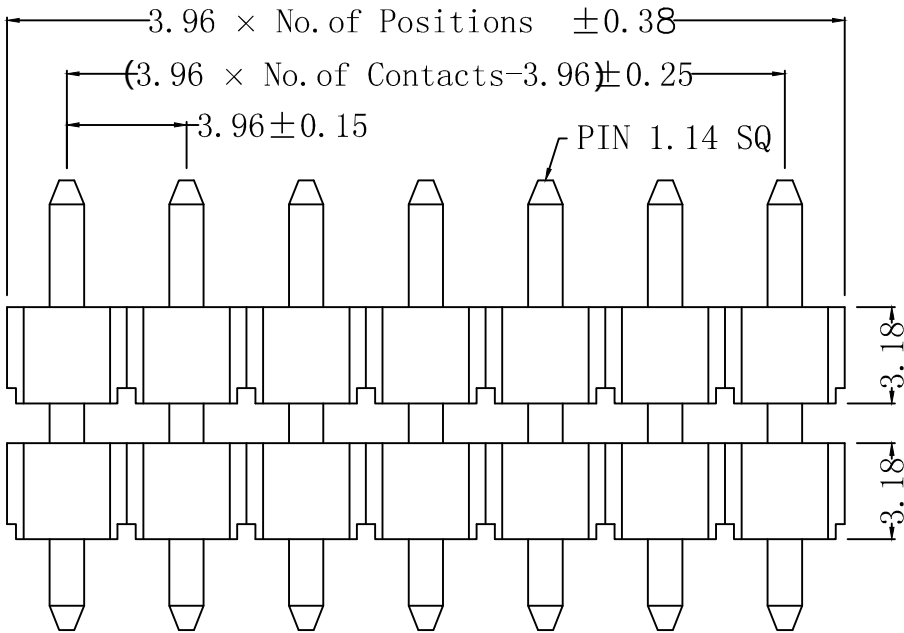


REV	DESCRIPTION	DATE

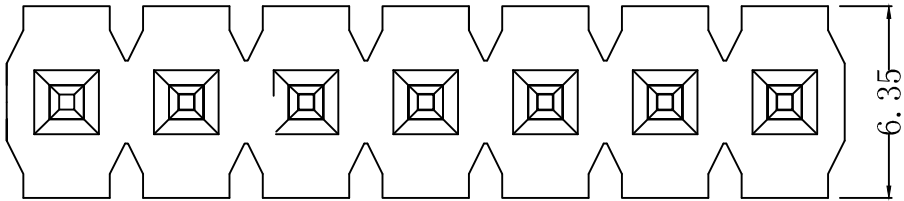


SPECIFICATIONS

Current Rating:7.9 Amps
Insulator resistance:1000 mΩ Min.
Dielectric withstanding:AC/DC 1500 V
Contact Resistance:20mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Brass
Insulator Material:High Temperature Thermoplastic,LCP UL94V-0
Finish:Tin Plated over nickel
All materials must meet RoHS requirements

Recommended P. C. Board
Hole Layout

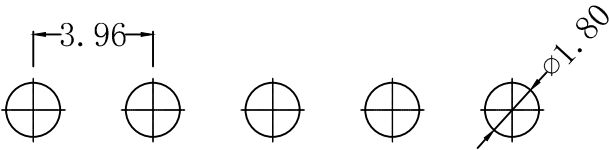

Ordering Information						
CNT	-	M396	-	1*XX	-	TS - A/E/B - H
A		E				
B		F				
H	3.18	W				
	Male header	Pitch 3.96mm	No. of Pins per Row	Tin Plated &Straight	Custom Length Available	Plastic height

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE 3.96mm Pin Header Board Spacer Single Row Straight
				X. ° ±5°	X. ±0.30				
				. X° ±3°	. X ±0.38	CHECK 王芳芳	DATE 20190321		
REV. 1.0	UNIT mm	SCALE 1:1		. XX° ±2°	. XX ±0.25			APPROVE 王元中	
			. XXX° ±1°	. XXX ±0.15					