


RoHS

参考图面

REV	DESCRIPTION	DATE

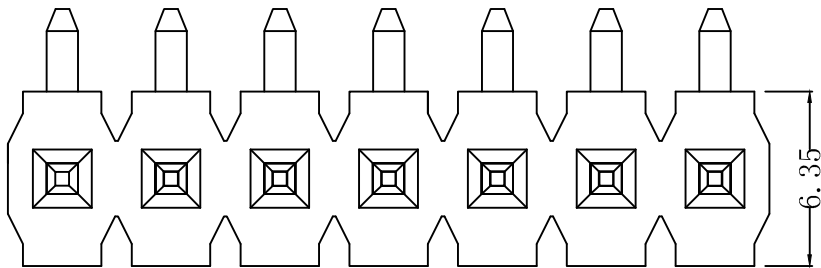

D Type

SPECIFICATIONS

Current Rating:7.9 Amps

Insulator resistance:1000 m Ω Min.

Dielectric withstanding:AC/DC 1500 V

Contact Resistance: 20mΩ Max

Operating Temperature:-40° C - +105° C


MATERIALS

Contact Material:Brass


Insulator Material:High Temperature Thermoplastic, LCP UL94V-0

Finish: Tin Plated over nickel

All materials must meet RoHS requirements

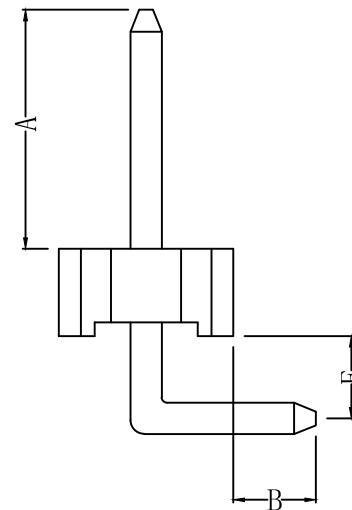

Recommended P.C. Board
Hole Layout

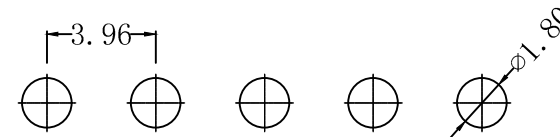

Ordering Information

CNT	-	M396	-	1*XX	-	TD	-	A/B/E	-	H		
		T		T		T		T		T		
		Male header		Pitch 3.96mm		No. of Pins per Row		Tin Plated &Right angleType		Custom Length Available		Plastic height

A		E	
B		F	
H	3.18	W	

C N T 肯耐特电子有限公司

<i>C N T</i> 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE 3.96mm Pin Header Board Spacer Single Row Right Angle
				X. ° ±5°	X. ±0.30	CHECK 王芳芳	DATE 20190321		
				.X° ±3°	.X ±0.38		APPROVE 王元中	DATE 20190321	
				.XX° ±2°	.XX ±0.25				
				.XXX° ±1°	.XXX ±0.15				
REV. 1.0	UNIT mm	SCALE 1:1							